


The ESP- LX IVM can control up to \_\_\_\_\_ stations.

The ESP- LX IVM Pro can control up to \_\_\_\_\_ stations.

The IVM 2-Wire Interface Module has the following:

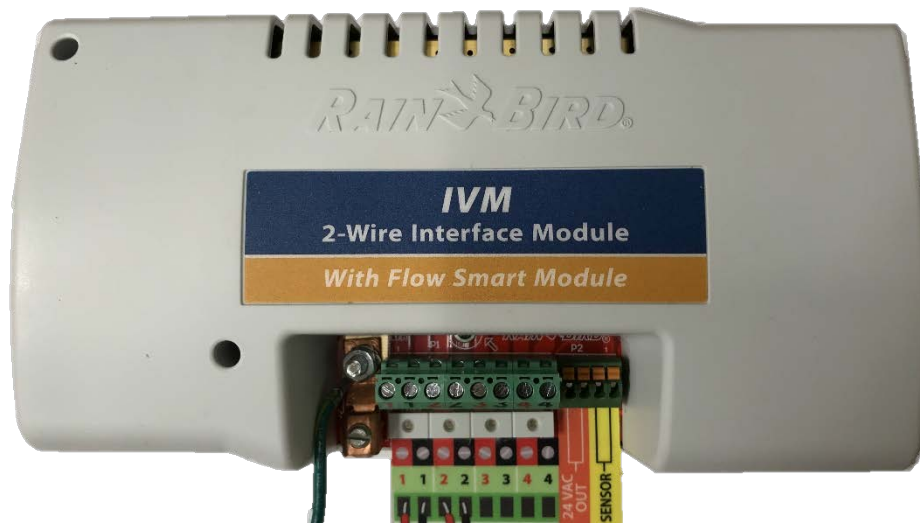

- \_\_\_ Wire Paths
- \_\_\_ Local Weather Sensor w/ 24 VAC Terminals
- Grounding Terminal for #6 AWG Bare Copper Grounding Wire
- \_\_\_ Status Lights

The IVM-SOL is unique in what ways?



- For Rain Bird \_\_\_\_\_ Valves
- Not compatible with Rain Bird \_\_\_\_\_ Valves

IVM-SEN is used for:



\_\_\_\_\_ and \_\_\_\_\_ sensors

The IVM-OUT is used for



- Third party valves with latching \_\_\_ solenoids
- Use with non-irrigation applications using a \_\_\_\_ latching relay

The IVM-SD is used for:



- For \_\_\_\_\_ Protection
- 1 every \_\_\_\_\_ feet or \_\_\_\_\_ field devices (whichever comes first)

